

(43) International Publication Date
8 September 2017 (08.09.2017)

(51) International Patent Classification:

C12M 1/32 (2006.01) *C12M 1/12* (2006.01)
C12M 1/00 (2006.01) *C12M 1/34* (2006.01)

(21) International Application Number:

PCT/US2017/019889

(22) International Filing Date:

28 February 2017 (28.02.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/300,983 29 February 2016 (29.02.2016) US

(71) Applicant: **THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL** [US/US]; Office of Technology Development, 100 Europa Drive, Suite 430, Chapel Hill, North Carolina 27517 (US).

(72) Inventors: **ALLBRITTON, Nancy**; 907 Greenwood Road, Chapel Hill, North Carolina 27514 (US). **WANG, Yuli**; 614 Piper Stream Circle, Cary, North Carolina 27519 (US). **SIMS, Christopher**; 907 Greenwood Road, Chapel Hill, North Carolina 27514 (US). **DOBES, Nicholas C.**; 3702 Chimney Ridge Place, No. 103, Durham, North Carolina 27713 (US). **GEBHART, Steven C.**; 7114 Kobold Lane, Durham, North Carolina 27707 (US). **TROTTE, Nicholas Clayton**; 406 Old Fox Trail, Durham, North Carolina 27713 (US).

(74) Agent: **JOHNSTON, Michael G.**; Moore & Van Allen PLLC, P.O. Box 13706, Research Triangle Park, North Carolina 27709 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

[Continued on next page]

(54) Title: ARRAY OF MICRO-ELEMENTS FOR HIGH RESOLUTION AND HIGH CONTENT IMAGING AND SORTING OF CELLS

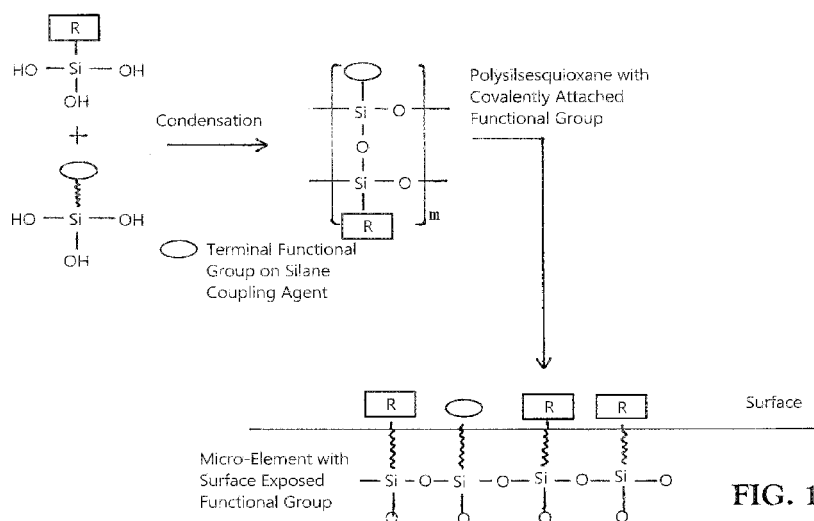


FIG. 1

(57) Abstract: An array of magnetic or paramagnetic micro-elements comprised of polysilsesquioxane is described having ultra-low-autofluorescence and other optical properties to improve microscopic imaging of cells or other objects present on the array. These materials are also amenable to chemical modification allowing surface attachment of affinity capture moieties or chemical reporters for selective binding or analysis of cells, macromolecules or other targets.



Published:

— *with international search report (Art. 21(3))*

ARRAY OF MICRO-ELEMENTS FOR HIGH RESOLUTION AND HIGH CONTENT IMAGING AND SORTING OF CELLS

CROSS-REFERENCES

5 This application is related to United States provisional application number 62/300,983, filed February 29, 2016, entitled “ARRAY OF MICRO-ELEMENTS FOR HIGH RESOLUTION AND HIGH CONTENT IMAGING AND SORTING OF CELLS”, naming Nancy Allbritton, Yuli Wang and Christopher Sims as the inventors. The contents of the provisional application are incorporated herein by reference in their entirety, and the
10 benefit of the filing date of the provisional application is hereby claimed for all purposes that are legally served by such claim for the benefit of the filing date

BACKGROUND

 Prior embodiments of an array of micro-elements as cell carriers were composed of
15 micron-scale polystyrene elements, each termed a “micraft”, doped with ferromagnetic nanoparticles. Within the array, the micrafts serve as releasable culture sites or cell carriers for individual cells or colonies. Cells are plated on the array in the same manner as a Petri dish, and the cells remain positioned on specific micrafts while in culture so that single cells can expand into clonal colonies or obtained as isolated single cells or colonies for
20 further analysis. Analysis of the individual cell or colony can take place at one or multiple time points, dramatically expanding the potential criteria used for selection. In one embodiment target cells or colonies are isolated using a probe which is pushed through the compliant polydimethylsiloxane (PDMS) substrate to dislodge a micraft and its attached cell or colony. Upon release, the individual micraft carrier with its attached cell or colony is
25 collected by a magnetic wand and delivered to a separate vessel. This strategy achieves cell isolation with excellent viability and purity; for example, single-cell cloning efficiencies of greater than 95% have been realized with 100% purity.

 There are many advantages of using polystyrene to create micrafts. Polystyrene is the material frequently used for manufacturing cell culture devices (e.g. petri dishes, multi-
30 well plates). Polystyrene is well known as a biocompatible material for cell culture. Once plasma treated, the surface properties of polystyrene are stable for a shelf life of up to several years. Polystyrene can be stably mixed with ferromagnetic nanoparticles by introducing a small moiety of acrylic acid to the polystyrene chain. Polystyrene can be dissolved in

gamma-butyrolactone (GBL), a solvent that does not swell elastomeric materials such as PDMS that are used to fabricate array substrates.

Although polystyrene has the above advantages, it has distinct limitations, one of which is substantial autofluorescence at blue and green wavelengths. This range of wavelength overlaps many common fluorophores used in life science research such as fluorescein isothiocyanate (FITC), green fluorescent protein (GFP), Alexa Fluor 488, rhodamine B, *etc.* The autofluorescence of micro-elements made from polystyrene interferes and blurs the imaging of cells grown on their upper surface, especially for subcellular structures which emit a relatively low level of fluorescent signal using the standard tools available to life science researchers. In addition, the refractive index of polystyrene differs significantly from the refractive index of elastomeric materials such as PDMS that are used to form the substrate of an array. This results in the refraction of light across multiple, disparate indices as the light passes from the source to the observer, thereby resulting in reduced image quality or signal intensity. Also, the transparency of polystyrene at light wavelengths near or below the low end of the visible spectrum can be diminished. Therefore, micro-elements with improved optical properties, including ultra-low autofluorescence, would greatly benefit high-resolution and high-content imaging of subcellular structures of live cells on the microrraft arrays. Also, adding a capability to undergo chemical modification allowing the covalent attachment of biological or chemical moieties both at the time of fabrication or immediately prior to an experiment would further expand the uses of microrraft arrays for cell studies.

SUMMARY

A first aspect of the invention is an apparatus for collecting or culturing cells or cell colonies. The apparatus comprises a substrate formed from a flexible resilient polymeric material and having a first surface and an opposed second surface and a plurality of wells formed in the first surface in the form of an array; and a plurality of micro-elements releasably connected to the substrate. The micro-elements of the invention comprise a polysilsesquioxane having improved properties for imaging resulting from low autofluorescence of the micro-element and refractive indices of the micro-element and the substrate that are closely matched. The micro-element may further comprise ferromagnetic particles.

In some embodiments the substrate comprises an elastomer. The elastomer in some embodiments is polydimethylsiloxane.

In some embodiments, the polysilsesquioxane is a thermosetting polysilsesquioxane resin. The polysilsesquioxane resin in some embodiments is polymethylsilsesquioxane.

The micro-elements of the invention may be functionalized with a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine. The R-terminal functional group may in some embodiments be covalently bound to a biologically or chemically active moiety.

A further aspect of the invention is a method of collecting cells or cell colonies, comprising providing an apparatus having improved properties for imaging. The apparatus comprises a substrate formed from an elastomer and having a first surface and an opposed second surface and a plurality of wells formed in the first surface in the form of an array, and a plurality of micro-elements having low autofluorescence and a refractive index closely matched to the refractive index of the substrate, each micro-element disposed in one of the wells and configured to release from the substrate upon mechanical distortion of the substrate, each micro-element comprising polysilsesquioxane; depositing a liquid media carrying the cells on the apparatus so that the cells settle on or adhere to the micro-elements; and releasing at least one selected micro-element having the cells thereon by application of gradual mechanical pushing energy to the second surface of the substrate opposite the well in which the at least one selected micro-element is disposed until the at least one selected micro-element is released; and then collecting the at least one selected micro-element.

In some embodiments of the method each micro-element of the plurality of micro-elements further comprises ferromagnetic particles. In other embodiments each micro-element of the plurality of micro-elements further comprise a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine.. The R-terminal functional group may in some embodiments be covalently bound to a biologically or chemically active moiety.

In another embodiment, the application of gradual mechanical pushing energy is carried out by positioning a probe adjacent the second surface of the substrate and oriented towards the at least one selected micro-element, and then progressively contacting the probe to the substrate until the at least one micro-element is released therefrom. A cell or cell colony may be isolated by the method.

A further aspect of the invention is a method of making an apparatus for collecting or culturing cells or cell colonies, the method of making comprising: providing a substrate

formed from an elastomer and having a first surface and an opposed second surface and a plurality of wells formed in the first surface in the form of an array; coating the substrate with a fluid mixture comprising a polysilsesquioxane and a compatible solvent; drying the coated substrate for removing the solvent and forming a rigid low auto-fluorescent cell carrier in each of the wells. In one embodiment, the compatible solvent is gamma-butyrolactone (GBL).

In some embodiments, the method of making uses the elastomer polydimethylsiloxane. In other embodiments, the method of making further comprises a polysilsesquioxane and compatible solvent mixture that further comprises ferromagnetic particles. In some embodiments the polysilsesquioxane is a thermosetting polysilsesquioxane resin. In further embodiments the polysilsesquioxane resin is polymethylsilsesquioxane.

In some embodiments, the method of making further comprises cell carriers that are functionalized with a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine.. The functionalized micro-elements may further comprise a covalently bound biologically or chemically active moiety.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, reference should now be had to the embodiments shown in the accompanying drawings and described below. In the drawings:

Figure 1 shows co-polymerization of a polysilsesquioxane with a functionalizing reactive group and formation of a micro-element with surface exposed functional group.

Figure 2 shows preparation of epoxide functionalized polysilsesquioxane including the use of ferromagnetic particles which is optional.

Figure 3 shows hydrolysis of glycidoxy-propyltrimethoxysilane (GOPTS) resulting in replacement of the methoxyl groups with silanol groups, allowing copolymerization with unmodified GR650F and exposed epoxide groups on the polymer surface.

Figure 4 shows preparation of a mixture of GR650F, a ferromagnetic nanoparticles and GBL. (A) Exchange of ligand from oleic acid to gallic acid made the nanoparticles stably dispersed in GBL. (B) Photo of the mixture of GR650F, ferromagnetic nanoparticles and GBL in a glass vial wherein the mixture is pulled up against gravity in the vial using an external magnet.

Figure 5 shows (A) Schematic of an embodiment of a dip coating process to for fabricating GR650F rafts on a PDMS microwell plate, i) A PDMS microwell template shown in gray. ii) A solution of GR650F ferromagnetic nanoparticles shown in purple is added to the microwell array and subsequent degassing is used to remove trapped air bubbles. iii) The wetted plate is immersed in the GR650F solution and then slowly withdrawn. iv) The dewetting of solution from the template results in retention of isolated convex GR650F solution in each well. v) Evaporation of solvent results in concave micrafts inside each well. (B) Selective release of the targeted micraft from the array by a needle. i) Array before release. ii) A targeted micraft labeled with four-digit number 0709 released from the array leaving an empty microwell. iii) Released micraft collected in a separate plate. (C) Cell culture on GR650F micrafts wherein HeLa cells proliferate on the micrafts at (i) 1 h, (ii) day 3 and (iii) day 7. Scale bar = 200 μm .

Figure 6 shows single cell isolation and cloning enabled by a magnetic glass resin micraft array with a top panel: brightfield, and a bottom panel: fluorescence image using a FITC filter set. (A) A mixture of H1299 and GFP-H1299 cells on the array and a single GFP-H1299 cell (indicated by an arrow) identified. (B) The GFP-H1299 cell isolated and transferred to one well of a 96-well plate, and the well was filled with 150 μL medium containing 10 $\mu\text{g/mL}$ human fibronectin, which coated the glass resin micraft and well and assisted the migration of cells from the glass resin micrafts to the well. (C) At 24 h after isolation, the single cell divided into two cells. (D) At 72 h after isolation, the single cell proliferated into a colony of GFP-H1299 cells.

Figure 7 shows autofluorescence of GR650F micrafts. (A) Fluorescence intensity of the rafts measured using four filter sets: DAPI, fluorescein, CY3 and CY5. (B) Autofluorescence signals reduced in the GR650F rafts compared with polystyrene rafts, the GR650F raft arrays enabling the use of higher gain when cells are seeded on the array due to the reduction in autofluorescence. (C) GR650F rafts enabling higher resolution imaging of HeLa cells, allowing improved abilities to visualize subcellular features of actin (green) filaments and mitochondria (red).

Figure 8 shows improved image quality of GR650F micrafts due to refractive index homogeneity with surrounding medium and material. (A) Schematic showing refractive indexes of micraft, PDMS and cell culture medium. (B) Brightfield image of HeLa cells cultured on magnetic polystyrene-based micrafts. Cells located near the edge of micrafts

(indicated by arrows) were partially shaded by dark borders. (C) Brightfield image of H1299 cells cultured on magnetic GR650F microrrafts. Scale bar = 100 μm .

DETAILED DESCRIPTION

5 An array of magnetic or paramagnetic microfabricated elements, or micro-elements, comprised of polymeric forms of silsesquioxane, or polysilsesquioxanes, is provided having ultra-low-autofluorescence and other optical and chemical properties to improve microscopic imaging and analysis of cells or other objects present on the array.

Polysilsesquioxanes are a family of high-performance, thermosetting resins based on an alternating silicon-oxygen network and fabricated using purified monomers that yield polymers having exceptional properties. The polysilsesquioxanes cure by condensation and, once cured, are insoluble in all common organic solvents. It has been discovered that polysilsesquioxanes can be used to make micro-elements with improved optical and imaging properties compared to polystyrene or other polymeric plastics typically used with cell isolation and culture. It has been further discovered that various polysilsesquioxanes can be used for the desired structural, functional properties for the fabrication of ferromagnetic micro-element arrays. Polysilsesquioxanes also enable the chemical modification of the micro-element surface for addition of functional biochemical or chemical moieties.

A silsesquioxane is an organosilicon compound with the chemical formula $[\text{RSiO}_{1.5}]_n$ (for example, R = alkyl, aryl or alkoxyl), where each silicon atom is bound to an average of one and a half (sesqui) oxygen atoms and to one hydrocarbon group (ane). Silsesquioxanes are colorless solids that adopt cage-like or polymeric structures with Si-O-Si linkages and tetrahedral Si vertices. Diverse substituents (R) can be attached to the Si centers. The molecules are unusual because they feature an inorganic silicate core and an organic exterior. The silica core confers rigidity and thermal stability. Silsesquioxanes are known in molecular form with 6, 8, 10, and 12 Si vertices, as well as polymers.

Silsesquioxanes are synthesized by using trifunctional organosilane compounds and are an organic/inorganic hybrid material that combines the inorganic characteristics presented by the siloxane bond (Si-O-Si), which constitutes the main chain, and the organic characteristics presented by the organic functional group that constitutes the side chain. Silsesquioxanes offer a flexibility in chemical design since the siloxane bond of the inorganic structure shows excellent transparency, heat resistance, hardness, and electrical resistance, and the organic functional group gives such functions as compatibility or dispersion stability, adjustment of fraction factor and permittivity, and reactivity (epoxy, acryl, etc.). Furthermore,

it is known that polysilsesquioxanes can be produced having a random structure, a ladder structure, or a cage structure where each form shows different characteristics not only by changing the types of organic functional bases, but also the control of such structures, degree of polymerization, or the molecule end group. One example of such a polymer is

5 polymethylsilsesquioxane. Polysilsesquioxanes may also be formed from polyhedral oligomeric silsesquioxanes ("POSS"), which have attracted attention as precursors to ceramic materials and nanocomposites.

These materials are amenable to being functionalized through chemical modification allowing surface attachment of affinity capture moieties or chemical reporters for selective
10 binding or analysis of cells, macromolecules or other targets. Processes are described for manufacturing high resolution arrays including the formulation of micro-elements and micromolding of the individually-releasable, ferromagnetic micro-elements in an array format having improved optical properties, including ultra-low autofluorescence. The arrays produced using these processes and compositions overcome a number of problems related to
15 image acquisition and analysis caused by the use of polystyrene in previous micrafft arrays. Also, chemical modification of the micro-element material permits preferential attachment of affinity capture and chemical moieties to the micrafft while excluding these modifications from the substrate where the micro-element resides in a well. Covalent attachment of functionalizing chemistries can be achieved at the time of manufacturing the micro-elements
20 through co-polymerization or polymer capping methods, or alternatively by surface treatment of a micro-element immediately prior to a given experiment by the end user. The micro-elements and arrays containing them provide several benefits for research in the life sciences, among them are improved, high-resolution and high-content imaging of subcellular structures of live cells; isolating the target cells for clonal expansion or downstream molecular analysis
25 based on phenotype analysis prior to collection from the array; and high-precision affinity-based capture of cells, macromolecules or other targets of interest.

Embodiments of the invention now will be described more fully with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited
30 to the embodiments set forth herein. Terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" or "comprising," when used in this specification, specify the

presence of stated features, steps, operations, elements, or components, but do not preclude the presence or addition of one or more other features, steps, operations, elements, components, or groups thereof. Additionally, comparative, quantitative terms such as “above”, “below”, “less”, “more”, are intended to encompass the concept of equality, thus, “less” can mean not only “less” in the strictest mathematical sense, but also, “less than or equal to.”

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms used herein should be interpreted as having a meaning that is consistent with their meaning in the context of this specification, commonly used dictionaries, and the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein. Well-known functions or constructions may not be described in detail for brevity and/or clarity.

Like numbers refer to like elements throughout. In the figures, the thickness of certain lines, layers, components, elements or features may be exaggerated for clarity. Where used, broken lines illustrate optional features or operations unless specified otherwise.

As used herein, the term “and/or” includes any and all possible combinations or one or more of the associated listed items, as well as the lack of combinations when interpreted in the alternative (“or”).

It will be understood that when an element is referred to as being “on,” “attached” to, “connected” to, “coupled” with, “contacting,” etc., another element, it can be directly on, attached to, connected to, coupled with and/or contacting the other element or intervening elements can also be present. In contrast, when an element is referred to as being, for example, “directly on,” “directly attached” to, “directly connected” to, “directly coupled” with or “directly contacting” another element, there are no intervening elements present. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed “adjacent” another feature can have portions that overlap or underlie the adjacent feature.

Spatially relative terms, such as “under,” “below,” “lower,” “over,” “upper” and the like, may be used herein for ease of description to describe an element’s or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is inverted, elements described as “under” or “beneath” other elements or features would then be oriented “over” the other elements or features. Thus the exemplary

term “under” can encompass both an orientation of over and under. The device may otherwise be oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly. Similarly, the terms “upwardly,” “downwardly,” “vertical,” “horizontal” and the like are used herein for the purpose of explanation only, unless specifically indicated otherwise.

It will be understood that, although the terms first, second, etc., may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. Rather, these terms are only used to distinguish one element, component, region, layer and/or section, from another element, component, region, layer and/or section. Thus, a first element, component, region, layer or section discussed herein could be termed a second element, component, region, layer or section without departing from the teachings of the invention. The sequence of operations (or steps) is not limited to the order presented in the claims or figures unless specifically indicated otherwise.

The micro-elements of the invention are arranged in an array that is generally comprised of a substrate formed from a flexible resilient polymeric material and having a plurality of wells formed therein. The micro-elements are releasably connected to the wells of the substrate, with said micro-elements arranged in the form of an array, and with each of the micro-elements resiliently received in one of said wells. The wells in said substrate can be separated by walls. The walls may be uniform or non-uniform and of any suitable dimension. In some embodiments, the walls have an average width of at least 2 micrometers, up to 5, 10, 100, 200, 500, or 1000 micrometers. In general, the walls have an average height of at least 2 or 5 micrometers, up to 200, 500, or 1000 micrometers. The wells in the substrate in some embodiments have floors. The floors can be uniform or non-uniform and of any suitable thickness. In some embodiments, the floors have an average thickness of from 2 or 5 to 200 or 500 micrometers.

"Substrate" as used herein is, in general, a flexible or elastomeric substrate, and may be conveniently formed from a material in which wells may be produced and the micro-elements formed directly therein. The wells are preferably made in a first surface of the substrate. Examples include, but are not limited to, silicones (*e.g.*, polydimethylsiloxane (or "PDMS"), Silastic, Texin and ChronoFlex silicone materials), polyurethane substrates, styrene-butadiene copolymer, styrene-ethylene-butylene copolymer, polyolefin and polydiene elastomers, thermoplastic elastomers, other biomedical grade elastomers, etc. In one embodiment, the substrate can easily be fabricated by casting PDMS on a mold made by

standard photolithography on a glass slide with a 40-100 μm thick SU-8. The microwell substrate may also be fabricated by hot embossing or thermoforming on a suitable mold, or by any other suitable technique, such as printing or microprinting. The array of micro-elements may be in any suitable uniform or non-uniform arrangement, including but not limited to interdigitated arrays and/or tilings. In one embodiment, the micro-elements are used as cell carriers to create arrays as described in United States Patent 9,068,155, and US 2015/0210972, both of which are incorporated herein by reference in their entirety.

The micro-elements may be in any suitable geometry, including cylindrical, elliptical, triangular, rectangular, square, hexagonal, pentagonal, octagonal, concave, convex, etc., including combinations thereof. In some embodiments, the carriers have heights of at least 2 micrometers, up to 400 or 500 micrometers. In some embodiments, the carriers have maximum widths of at least 5 or 10 micrometers, up to 1000 micrometers. While any desired physical or structural feature can be incorporated into the carrier top portion, alone or in combination, in one embodiment a concave top surface portion is conveniently formed by meniscus coating of the side walls of said wells or cavities in the substrate during the process of casting said carriers in those cavities or wells. These micro-elements may be also variously referred to as micron-scale element, micrafts, rafts, cell rafts, cell carriers, carriers, and the like.

Any number of micro-elements may be contained in an array. In some embodiments an array may comprise as few as 10 micro-elements up to 500,000 micro-elements depending on the size of the micro-elements. The number of micro-elements in an array is limited only by the chosen dimensions of the substrate and the size of micro-elements used.

The micro-element arrays of the invention provide a method of collecting or culturing cells or cell colonies, generally involving the steps of: (a) providing an apparatus comprising a common substrate, the substrate formed from an elastomer and having a plurality of wells formed therein in a first surface in the form of an array, and a plurality of micro-elements releasably received in those wells, as described above; (b) depositing a liquid media carrying the cells (including but not limited to non-adherent cells) on apparatus so that the cells settle on or adhere to the micro-elements; and then (c) releasing at least one selected micro-element having the cells thereon by application of release energy to an opposing second surface of the substrate opposite each of the at least one micro-element from the well in which it is received. The released micro-elements may be collected by numerous suitable means and placed into tubes, multiwell plates, culture dishes, and the like for further analysis or culture.

Release energy may be applied as a burst of energy, or may be applied in a gradual manner. In some embodiments of the present invention release energy is applied gradually, for example, by gradual mechanical pushing or vibrating. In general, any suitable device for applying a release energy gradually may be employed. In some embodiments, mechanical pushing is carried out by positioning a probe (e.g., a blunt probe, a needle, micropipette tip, etc), adjacent (e.g. above, below) beneath the common substrate and oriented towards the at least one selected micro-element, and then progressively contacting the probe to the substrate. In some embodiments the probe does not pierce the substrate; in other embodiments the probe pierces the substrate and contacts and dislodges the at least one micro-element. In some embodiments the pushing is aided by or guided by a microscope (e.g., an optical microscope, a fluorescent microscope). In such embodiments, the probe may be connected to or mounted on the microscope objective in a configuration that permits visualization of the selected micro-element to be dislodged by the probe through the microscope objective as an aid or guide to carrying out the pushing or dislodgement of the selected micro-element. The microscope may be a simple manual optical microscope, with pushing carried out manually, or a partially or fully automated microscope with pushing or dislodgement of the micro-element achieved or carried out in an automated manner by movement of the objective (e.g., with a manual or automated XYZ drive stage, and/or with a drive or drive assembly included in the microscope objective assembly).

Micro-elements of the present invention may be composites of two or more (e.g., 2, 3, 4, 5, 6) layers, with each layer formed of a different material, or having a different composition, than the immediately adjacent layer or layers. This feature can be used to incorporate a variety of advantageous structural and/or functional features into the micro-element. In some embodiments, the micro-elements may be made magnetic or ferromagnetic by incorporating magnetic or ferromagnetic particles or nanoparticles into one or more layers of the micro-element, which allow the collection of the micro-elements to be facilitated by the use of magnetic wands or other magnetic transfer devices. In some embodiments, the micro-elements comprise two or more layers so long as the optical properties of the micro-elements are not substantially reduced. In addition a cell-growth compatible upper layer on which cells can be grown may be added, such as a gel layer (e.g., matrigel or hydrogel, containing growth factors, antibodies, or the like). For example, the cell growth-compatible upper layer may comprise a hydrogel (optionally containing live feeder cells to facilitate the growth of cells thereon, in any suitable amount, e.g., from 1, 5 or 10 to 100 or 1,000 cells per

micro-element, such as murine embryonic fibroblasts), a biodegradable polymer, a biologically active material or biomolecule as described above, etc.

Micro-elements of the invention can be formed in the wells of a substrate by any suitable technique known in the art, such as dip-coating, drain-coating, spin-coating, or spray-coating. The micro-elements can likewise be formed in the wells of a substrate by casting the micro-elements in the cavities or wells formed during fabrication of the substrate.

Fabricating micro-element arrays using polysilsesquioxanes has several advantages with respect to optical properties, including comparable refractive index relative to substrate materials such as PDMS and low autofluorescence relative to previous polystyrene microrrafts. These properties allow clear imaging of fluorescent signals and subcellular features with a significant reduction in “shadowing” around the perimeter of the micro-element allowing more of the microelement area to be used for imaging.

The selection of a suitable polysilsesquioxane for fabrication of a micro-element of the invention depends on several physical, chemical, and optical properties. The uncured polysilsesquioxane is preferably soluble in a solvent (e.g. gamma-butyrolactone, isopropanol, ethanol, etc.) at a certain concentration (e.g. in the range of 20-80 wt%) that does not cause swelling, dissolution, or deformation of the substrate during the fabrication of the micro-element in the wells of the substrate. The solvent compatibility of many substrates is well known in the art, and is also easily determined empirically. For example, it is known in the art that substrates formed from polydimethylsiloxane (PDMS) do not swell in the presence of polar solvents such as gamma-butyrolactone, isopropanol, ethanol, etc.

A suitable polysilsesquioxane is also preferably optically transparent when cured, and possesses improved optical clarity relative to polystyrene. The measurement of optical transparency or transmittance is well known in the art and can be determined by any suitable means. The relative optical clarity of a transparent material can be measured by assessing the impact of its introduction to the imaging path on the spatial resolution power of an imaging system, which is defined as the minimum distance between two objects below which the objects can no longer be differentiated as separate. For example, a relative optical clarity measurement can be performed by acquiring brightfield images of a negative 1951 United States Air Force resolution target (ThorLabs, Newton, NJ) using a suitable microscope and digital camera, both without and with a thickness of the optically transparent material overlaid onto the resolution target. Within the two images, the spatial resolution can be quantified by calculating the contrast ratio of image intensities between the bright lines and dark spaces for each of the sixty rulings within the target and defined as the line spacing

corresponding to a contrast ratio of the square root of 2. A polysilsesquioxane suitable for use in the micro-elements of the invention should have a degradation in spatial resolution of preferably less 95%, more preferably less than 90%, and most preferably less than 80% of the degradation from polystyrene.

5 A suitable polysilsesquioxane should also form a micro-element that possesses low autofluorescence. Autofluorescence is that fluorescence exhibited by a material in the background. When a fluorescent cell or cells are present on a material with a high autofluorescence, there is a deterioration in the signal to noise ratio of the cell's fluorescent signal. A low signal to noise ratio can obscure the detection or measurement of the
10 fluorescent signal from a target cell or its subcellular components. It is preferable that a polysilsesquioxane should form a micro-element that has low to negligible autofluorescence in the range of 350-700 nm, which coincides with the range of wavelengths of the most frequently used dyes (e.g. FITC, Oregon green, Alexa Fluor 488, DAPI, CY3, CY5, Texas Red, GFP, RhodamineB, Hoescht 33342, Alexa Fluor 594, Alexa Fluor 647) for fluorescence
15 imaging. Autofluorescence can be determined using epi-fluorescence imaging on a suitable microscope. Using consistent exposure times and gain settings (for example, 1 sec exposure, 2X gain), images of micro-elements can be acquired both with the fluorescence source on (autofluorescence image) and the fluorescence source off (dark image). Using these images, average gray values for each image can be measured using a standard software program such
20 as ImageJ. Average gray values for the dark images are subtracted from the average gray values from the autofluorescence image to account for any stray light present and not a result of autofluorescence. These dark-subtracted values are a measure of relative fluorescence. This procedure can be used across the normal range of wavelengths using a set of selected fluorescent dyes such as GFP, DAPI, and CY3. Time course experiments can be conducted
25 by using a fluorescent standard such as the Autofluorescence Plastic Slide from Chroma (Bellows Falls, VT) as a normalization standard. These slides possess a stable level of autofluorescence over time and can be used to normalize for drift in arc lamp intensity typically seen as arc lamp bulbs age. A consistent exposure time and gain setting can be used to acquire images of the autofluorescence slide prior to each time-based measurement.
30 Average dark-subtracted gray values can be determined as described above from these normalization images, and the dark-subtracted average relative fluorescence measurements can be divided by the averaged normalization values to enable the comparison of analysis performed at different times. A polysilsesquioxane suitable for use in the micro-elements of the invention should exhibit an autofluorescence that is preferably less than 75%, or more

preferably less than 50%, or most preferably less than 25% of that exhibited by polystyrene under standardized testing conditions.

A suitable polysilsesquioxane must also produce a micro-element that possesses a refractive index that is closely matched to the refractive index of the substrate material. The refractive index determines how much light is bent, or refracted, when entering a material and when light passes through multiple layers having disparate indices the signal intensity and image clarity can be reduced. Preferably, the refractive index of the polysilsesquioxane micro-element should be within 10% of the refractive index of the substrate material used for the array, more preferably within 5%, and most preferably within less than 1%. The measurement of refractive index is well known in the art and can be determined by any suitable means.

A suitable polysilsesquioxane preferably forms a micro-element that has poor adhesion with a substrate, such as PDMS, so that the micro-element can be released from the wells of the substrate. A suitable polysilsesquioxane preferably possesses, when cured, sufficient mechanical strength to withstand the energy of release from the well of the substrate using a release probe. Poor adhesion and sufficient mechanical strength can be readily determined empirically without undue experimentation. Preferably, 80%, more preferably 90%, and most preferably greater than 95% of the micro-elements should be released intact from the wells of the substrate within three or less release cycles without disturbing neighboring micro-elements in the array.

One example of a suitable polysilsesquioxane is the polymethylsilsesquioxane GR-650F ($\text{RSiO}_{1.5}$)_n from Techneglas, where R is a methyl group. While in no way limiting the range of polysilsesquioxanes suitable for the invention, Table 1 lists several other exemplary and commercially available polysilsesquioxanes suitable for use in fabricating micro-elements having improved optical and imaging properties.

Product Name	GR100F	GR150F	GR630L	GR630S	GR650F	GR651L	GR653L	GR653LFP	GR654L	GR900F	GR950F
Physical Form	Flake	Flake	Liquid	Liquid	Flake	Liquid	Liquid	Liquid	Liquid	Flake	Flake
Color	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless	Colorless
% Solids	100	100	60	100	100	35	30	30	40	100	100
Solvent	-	-	Xylene	-	-	Ethanol- Butanol	Methanol- Butanol	Methanol- Butanol	Methanol- Butanol	-	-
Solubility	Polar & Aromatic	Polar & Aromatic	Aromatics	-	Polar	Polar	Polar	Polar	Polar	Polar & Aromatic	Polar & Aromatic
Viscosity**	20	17	24	550	28	11	11	11	12	15	14
Specific Gravity	1.3	1.3	1.05	1.16	1.3	1.3	1.3	1.3	1.3	1.3	1.3
Refractive Index	1.49	1.51	1.48	1.47	1.42	1.42	1.42	1.42	1.42	1.55	1.56
Organics	Methyl- Phenyl	Methyl- Phenyl	Methyl- Phenyl	Methyl- Phenyl	Methyl	Methyl	Methyl	Methyl	Methyl	Methyl- Phenyl	Phenyl

* Data source: <http://www.technoglas.com/products/resins800.htm>

** As supplied or 40% in Butanol, unit: cps.

Table 1: A selection of available polysilsesquioxanes suitable for fabricating micro-elements.

In one embodiment, GR650F was used to make ultra-low-autofluorescence ferromagnetic micro-elements for use in an array made from the elastomeric polymer PDMS as substrate. In order to fabricate microrrafts from GR650F a dip coating solution was first formulated comprising GR650F, ferromagnetic nanoparticles, and gamma-butyrolactone (GBL). Fabrication of the polysilsesquioxane micro-elements can be accomplished in various ways, for example using a dip-coating process similar to that used for fabricating microrrafts from polystyrene.

The use of a suitable polysilsesquioxane to fabricate micro-elements should also allow for the incorporation of functional chemical or biochemical moieties. Polystyrene is difficult to chemically modify to allow both covalent and non-covalent attachment of functional moieties to the surface of the polymer. Replacing polystyrene with polysilsesquioxanes as the material composition of a micro-element allows the use of a more straightforward chemical modification method for subsequent attachment of biological or chemically active moieties.

In some embodiments, the invention includes the functionalization of the micro-elements by incorporating one or more biologically or chemically active moieties that provide, for example, affinity capture or reporters that react to the presence of a target chemical. Examples of such moieties include, but are not limited to, a peptide, a protein, a carbohydrate, a nucleic acid, aptamers, a lipid, a polysaccharide, a hormone, an extracellular matrix molecule, a cell adhesion molecule, a natural polymer, an enzyme, an antibody, an antigen, a polynucleotide, a growth factor, a synthetic polymer, polylysine, a small molecule such as a drug or other chemical, etc., including combinations thereof. Incorporation of the functional moieties is preferably through, but not limited to, covalent bonding. More

particular examples of biologically active molecules include, but are not limited to, fibronectin, laminin, thrombospondin, collagen including collagen IV, elastin, tenascin, vitronectin, carbohydrates, and lipids, fibrinogen, tenascin, bovine pituitary extract, epidermal growth factor, hepatocyte growth factor, keratinocyte growth factor, and hydrocortisone. Also useful for functionalization of the micro-elements are pharmaceutical preparations or compounds; substances which influence the properties of biological cells; messengers; growth factors (e.g., vascular endothelial growth factor, bone morphogenic factor beta, epidermal growth factor, endothelial growth factor, platelet-derived growth factor, neural growth factor, fibroblast growth factor, insulin growth factor, or transforming growth factor); differentiation factors (e.g., neurotrophin, colony stimulating factor, transforming growth factor); antigens; allergens; etc. In some embodiments, fluorescent reporters such as fluorescent proteins that change their fluorescence intensity or color in response to a biochemical or biophysical change (e.g. fluorescent gelatin for invadopodia assay) and synthesis substrates for enzymes coupled to fluorophores, fluorescence quenchers, or chemical reporters such as sensor dyes that detect oxygen, pH, reactive oxygen species (ROS), nitric oxide, etc., and chemiluminescent enzymes such as luciferase, can be bound to the microelement.

In one embodiment, the micro-element can incorporate different types of biological reagents (for example, drugs, antibodies, growth factors, DNA plasmid, fluorescent reporters, etc.). These reagents can be covalently attached to the micro-elements through one or more functional groups exposed on the surface of the micro-element. Cells can then be plated on the array and the cell-reagent interactions can be quickly screened. The cells with desirable interactions can be released from the array and collected for further study. A very large number of rafts can be created on the array, e.g. 1 inch x 1 inch array contains 45,000 rafts (100 μm size). Many types of reagents or many different mixing ratios can be attached to the array; therefore, the functionalized micro-element array provides a platform for studying cell-reagent interaction.

In another embodiment, a biologically or chemically active moiety is bound only to the micro-element itself while being entirely excluded from binding to the walls of the substrate surrounding the micro-element. This property is particularly useful when, for example, the bound moiety is an affinity capture tag. Otherwise, targets intended to be captured on the micro-element (i.e. cells) will be attached to the microwell walls, rendering them largely unobtainable for downstream analysis through the release of the micro-element.

Thus, the micro-elements of the invention allow for the selective binding of biological or chemical moieties independent of the chemical properties of the substrate material.

The core structure of the silsesquioxane monomer features three silanol groups (Figure 1). This structure has broad capabilities for functionalization including the incorporation of epoxides, amines, carboxyls, alkenyls such as vinyl, mercapto, imides and other functional groups. Each of these chemical modifications can be used in a second reaction to covalently attach one or more biologically or chemically active moieties as well as affinity capture moieties comprising antibodies, peptides or aptamers. Various silane compounds are commercially available for use in introducing reactive groups into the polysilsesquioxane structure in order to functionalize the micro-elements. Exemplary sources of such compounds are Gelest, Inc. (Morrisville, PA) and Sigma-Aldrich (St. Louis, MO).

Suitable silane coupling reagents useful for incorporation into the micro-element for purposes of functionalization have the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine. (Figure 1, where $R=OH$). $R-Si(OH)_3$ is a reactive silane compounds which can be hydrolyzed from a stable silane compound $R-Si(R'')_3$ where R'' is chlorine, methoxyl, or ethoxyl. Condensation and/or co-polymerization reactions with the polysilsesquioxanes during formation of the micro-element introduces the functionalizing silane into the polymer structure as siloxane linkages (see Figure 1). The use of compounds having the silane functional group can also be used in a “capping” reaction after the polysilsesquioxane is condensed to a polymer. An exemplary fabrication process is shown in Figure 2. Exemplary silane coupling agents are 3-glycidoxypropyl methyldimethoxysilane (epoxide functional group), vinyltrimethoxysilane (vinyl functional group), 3-aminopropyltriethoxysilane (amine functional group), 3-mercaptopropylmethyldimethoxysilane (mercapto functional group), 3-triethoxysilyl)propylsuccinic anhydride (carboxyl functional group upon hydrolysis of anhydride), and triethoxysilylpropylmaleamic acid (carboxyl function group). Residual silanol ($SiOH$) groups at the surface of polysilsesquioxane can be capped with a silane compound $R(SiR_1)_3$ where R_1 is chlorine, hydroxyl, methoxyl, or ethoxyl. Examples of the silane compounds are glycidoxy-propyltrimethoxysilane, aminopropyltriethoxysilane, vinyltrichlorosilane.

In one embodiment, epoxide groups can be added to the core structure of the polysilsesquioxane GR650, which can then be used for the covalent attachment of affinity tags. To generate the epoxide-modified polysilsesquioxane a trimethoxysilane compound, 3-

glycidoxy-propyltrimethoxysilane (or GOPTS) can be used. Hydrolysis of GOPTS results in replacement of the methoxyl groups around the central silicon with hydroxyl groups compatible with GR650F polymerization (Figure 3). GOPTS has been used in other materials, such as glass, for chemical surface functionalization. Typically, GOPTS is a silane coupling reagent and is applied to a hydrophilic, hydroxyl group containing surface (e.g. glass, or plasma treated plastics/elastomers) to produce surface epoxide groups.

EXAMPLES

Example 1: Formulation of stably dispersed ferromagnetic nanoparticles in a mixture of GR650F and gamma-butyrolactone (GBL). In one embodiment, ferromagnetic nanoparticles were capped with oleic acid to allow the nanoparticles to be stably dispersed in a non-polar solvent such as toluene. The long aliphatic chain of oleic acid is used to prevent the aggregation of nanoparticles. Toluene, however, is not compatible with the silicone polymer PDMS typically used for the array substrate and causes swelling of the PDMS. An aprotic polar solvent, gamma-butyrolactone (GBL), was previously discovered not to cause swelling of PDMS but in which polymers such as polystyrene are soluble, making it a suitable solvent for the fabrication of polystyrene-based microrrafts. Using GBL as the solvent, however, resulted in rapid aggregation of the ferromagnetic nanoparticles in the GBL. To reduce or eliminate this aggregation a small moiety of acrylic acid, 1.5%, was added to the polystyrene chain. During the formulation process it is expected that the oleic acid moiety is replaced by the acrylic acid moiety during the exchange of solvent from toluene to GBL. This ligand exchange helps to stabilize the ferromagnetic nanoparticles in GBL. When using polystyrene in combination with ferromagnetic nanoparticles prepared as above in GBL as solvent the composition is stable for long periods without aggregation of nanoparticles.

Fabrication of micro-elements using polysilsesquioxanes presented a challenge because the polysilsesquioxane does not contain carboxyl groups that allow ligand exchange with oleic acid present on the ferromagnetic nanoparticles. When the polysilsesquioxane GR650F was combined with ferromagnetic nanoparticles in toluene and GBL, the ferromagnetic nanoparticles instantaneously aggregated. To address this challenge, it was discovered that capping the nanoparticles with a polar molecule such as gallic acid through ligand exchange allowed the nanoparticles to be stably dispersed in GBL. Figure 4A shows the ligand exchange of oleic acid-capped ferromagnetic nanoparticles with gallic acid. After the ligand exchange, ferromagnetic nanoparticles were capped with gallic acid instead of oleic acid.

In order to fabricate micro-elements using polysilsesquioxanes, oleic acid-capped ferromagnetic nanoparticles stably dispersed in toluene was prepared. To exchange the ligand, 2 g gallic acid was dissolved in 10 mL GBL, followed by adding 10 mL ferromagnetic nanoparticle (2.5 wt%) solution in toluene and then 30 mL ethanol. The mixture was stirred for 10 min. The mixture was then placed on a rotary evaporator at 70 °C for 30 min to remove toluene and ethanol, resulting in a darkly colored solution. To remove oleic acid and excess gallic acid, 60 mL hexane/ethanol (50:50 vol:vol) was mixed with the above solution, and centrifuged at 7,000 rpm for 5 min to precipitate the nanoparticles. The supernatant was decanted. The gallic acid-capped nanoparticles were dispersed in 10 mL GBL, and rinsed with 60 mL hexane/ethanol (50:50 vol:vol) and centrifuged at 7,000 rpm for 5 min. The rinse was repeated three times to ensure the complete removal of oleic acid and excess gallic acid. Finally the nanoparticles were dispersed in 10 mL GBL to generate a darkly colored, stable solution.

In the second step, 10 g GR-650F polysilsesquioxane (Techneglas, Perrysburg, OH) was added to 10 mL nanoparticle/GBL solution. The GR-650F completely dissolved after an overnight period. The mixture was centrifuged at 7,000 rpm for 30 min to precipitate nanoparticle aggregates. Only a trace amount of aggregates was observed after centrifugation. The solution was then decanted to a glass vial. The composition of the mixture is GR650F:ferromagnetic nanoparticle:GBL = 50:2.5:50 wt:wt:wt. The nanoparticles were stably dispersed and the solution was darkly colored. No precipitation or aggregation was observed over 3 months. The liquid composition could be magnetized and pulled up against gravity by a permanent magnet (Figure 4B).

Example 2: Fabrication of ferromagnetic GR650F polysilsesquioxane microraft array. Microrafts were fabricated from the above mixture (GR650F, ferromagnetic nanoparticle and GBL) by a dip coating process which utilizes discontinuous dewetting phenomena (Figure 5A). A PDMS substrate containing microwell structures in an array was first fabricated by replica molding (Figure 5A-i). The polysilsesquioxane composition was then added to the PDMS substrate in which microwells were formed (Figure 5A-ii). Degassing by vacuum was used if air bubbles were trapped in the microwells. Generating isolated microrafts inside individual microwells requires the polysilsesquioxane coating solution to be drained from the rigid plate surface by gravity without leaving any residue. Therefore, the coating solution must dewet from the PDMS substrate, which requires that the

difference in the surface energy of the PDMS template and microrraft solution be sufficiently large to ensure the discontinuous dewetting. This was satisfied in the current formulation by using GBL as the solvent, whose surface tension (35.4 dyne/cm) is different from that of PDMS (21 dyne/cm). An additional benefit of using GBL is that it is a solvent that does not swell PDMS. The microwell array was then immersed and withdrawn from the solution (Figure 5A-iii). The withdrawal was performed at a constant speed controlled by a slow DC rotary motor so that the solution was allowed enough time to drain from the PDMS surface. To maintain a constant concentration, the dip-coating was performed in a sealed glass jar to prevent evaporation of GBL. After the entire plate was withdrawn from the solution, each microwell was observed to be filled with liquid possessing a convex surface (Figure 5A-iv). The array was then baked in a horizontal position at 95°C for 16 h to evaporate the solvent. Evaporation resulted in shrinkage of the GR650F polymer and formation of a solid microrraft with a concave surface (Figure 5A-v). The thickness of this structure could be adjusted by altering the concentration of GR650F in the solvent. For example, by using 50 wt% concentration the height of the microrraft was approximately 1/2 of the depth of the well. The dip-coating strategy permits very large arrays to be created with ease. As an example, an extended array of 300 mm × 50 mm × 0.2 mm containing >10⁶ microrrafts (100 μm square, 20 μm inter-microrraft spacing) could be readily processed by this dip-coating method. The process provides for a simple mass production capability to create inexpensively high quality arrays containing polysilsesquioxane microrrafts.

Example 3: Optimization of GR-650F magnetic solution synthesis. The dispersion of ferromagnetic nanoparticles in a mixture of GR650F and GBL was modified to allow for a greater quantity of nanoparticles remaining dispersed for longer periods of time.

The first ligand exchange reaction involved adding 2 g gallic acid to 10 g of 200-proof ethanol and vortexing for 1 minute to fully dissolve the gallic acid. A 10 g quantity of nanoparticle solution (2.5% in toluene) was added to the dissolved gallic acid mixture and vortexed for 1 minute to mix. A 10 g quantity of GBL was then added, again followed by vortexing for 1 minute to mix. This mixture was then added to a 500-mL evaporating flask and rotary evaporated at 70 °C for 30 minutes to remove toluene and ethanol.

After rotary evaporation, a pre-mixed solution containing 20 mL of 200-proof ethanol and 15 mL of hexane was added to the 500-mL rotary evaporating flask containing the remaining GBL solution. The resulting solution was mixed thoroughly and decanted to a 50-

mL conical vial. The conical vial was then placed next to a 2" x 2" x 4" N48 neodymium magnet for 15 minutes to magnetically decant the nanoparticles from the solution. Once the nanoparticles had condensed to the side of the tube near the magnet, the remaining liquid was poured from the tube while the magnet was held in place to remove excess gallic acid.

5 After the first liquid decanting, a pre-mixed solution containing 15 mL of 200-proof ethanol and 7.5 mL of hexane was added to the remaining nanoparticles. This mixture was shaken manually for 1 minute to resuspend the nanoparticles, then placed next to the magnet to decant the nanoparticles and further remove excess gallic acid. Once the nanoparticles separated from the solution (60 min to overnight), the liquid was again removed and this
10 process was repeated one additional time for a total of three magnetic decanting steps.

After the final decanting step, 10 mL of GBL was added to the remaining nanoparticles and vortexed for 1 minute to mix. This mixture was then added to a 500-mL evaporating flask and rotary evaporated at 70 °C for 30 minutes to remove any remaining ethanol and hexane. After rotary evaporation, the mixture was cooled in an ice bath for 30
15 min.

Finally, 10 g of GR650F resin was added to the cooled nanoparticles in GBL mixture and was placed on a bottle roller for 3 hours to fully dissolve the resin. After dissolution, an optional overnight magnetic decanting could be performed to remove any unincorporated nanoparticles. This protocol produced ~15-18 mL of magnetic GR650F solution.

20 This procedure could be scaled up to produce the larger quantities of the GR650F magnetic solution for commercial fabrication. To demonstrate the ability to produce larger volumes of the material, a 2X reaction was performed by doubling the reagent quantities used in the optimized procedure above. The necessary mixing and decanting times required during the synthesis process remained the same, however the GR650F resin was mixed with the final
25 nanoparticle solution in GBL for 16 hours to ensure full dissolution. This procedure resulted in ~35 mL of magnetic GR650F solution.

Example 4: Selective release and GR650F polysilsesquioxane micrafts by a needle probe. GR650F micrafts can be selectively detached from the PDMS microwell
30 template by a stainless steel pin with tip diameter of 0.0125 mm and a base diameter of 0.1 mm (Fine Science Tools, #26002-10) (Figure 5B). The micraft array was treated with plasma for 5 min to render a hydrophilic surface, and 2 mL Dulbecco's Modified Eagle Medium (DMEM) containing 10% fetal bovine serum (FBS) was added to the array. To test the release and collection efficiency, the polysilsesquioxane micrafts were released from

the array using the steel pin by inserting the pin through the PDMS substrate under the micraft using a motorized CellRaft release device (Cell Microsystems, Inc., Research Triangle Park, North Carolina), and the released polysilsesquioxane micrafts were collected by attraction to a magnetic wand and transferred to a 96-well plate. All polysilsesquioxane micrafts (n=100) were successfully detached from the PDMS array substrate and collected by a magnetic wand. In terms of release efficiency, 66% micrafts were released in one attempt, 15% micrafts required two attempts, 12% micrafts required three attempts, and 7% micrafts required more than three pin insertions. All of the released polysilsesquioxane micrafts were collected by the magnetic wand and transferred to separated wells in a 96-well plate (*i.e.* collection and transfer efficiency = 100%).

Example 5: Cell culture on GR650F polysilsesquioxane micraft array. Since the micrafts are the sites in intimate contact with cells, the polysilsesquioxane micrafts must support the attachment and proliferation of adherent cells. Plasma treatment is a standard surface modification process to introduce charged chemical moieties on cell culture devices such as polystyrene Petri dishes. GR650F polysilsesquioxane micraft arrays were treated with plasma for 5 min to render a hydrophilic surface, followed by 30 min sterilization by ultraviolet germicidal irradiation. The polysilsesquioxane micrafts were then coated with fibronectin (Millipore, FC010) overnight at 37°C at 6.2 $\mu\text{g}/\text{cm}^2$ (*i.e.* 2 mL of 20 $\mu\text{g}/\text{mL}$ fibronectin in PBS), followed by washing with 2 mL PBS buffer $\times 3$ times. HeLa cells were plated on the micraft array at a cell density of 4,000 per array (12,000 micrafts per array). The distribution of cells on the array follows a Poisson distribution. At this cell density (cell:micraft = 1:3), theoretical calculation shows that 72% of micrafts are empty, 24% micrafts have single cells, and 4% micrafts have ≥ 2 cells. Therefore, the majority of cells (>72%) are present as a single cell on a micraft. This distribution is important as it maximizes the number of sites with single cells, which then can form clonal colonies or be released and collected for single-cell analysis by PCR or other techniques.

HeLa cells attached to fibronectin-coated GR650F polysilsesquioxane micrafts in 2 h (Figure 5C-i) as evidenced by their spreading morphology on the micrafts. The cells proliferated on the array over time (Figure 5C-ii), and at day 7 the cells covered entire polysilsesquioxane micrafts (Figure 5C-iii). This result demonstrates that GR650F polysilsesquioxane micrafts are biocompatible and can support long-term culture of adherent cells.

Example 6: Single cell isolation and cloning capabilities enabled by arrays

containing magnetic polysilsesquioxane microrrafts. To demonstrate the single cell isolation and cloning functions, a mixture of wild type H1299 (human non-small cell lung carcinoma cell line) and GFP-H1299 (stable transfection of green fluorescent protein [GFP]) cells were plated on an array composed of polysilsesquioxane microrrafts at a ratio of 95:5 (H1299:GFP-H1299). At 4 hours after cell plating, single GFP-H1299 cells were identified on the array (Figure 6A), isolated and transferred to a 96-well plate (Figure 6B). The isolated single cells proliferated into a high purity colony (Figures 6C and D). Isolation efficiency was 100±0% (n=3 experimental replicates, 10 single cells isolated per experiment). Cloning efficiency of single cells was 93.3±5.8%, and 100±0% purity was obtained.

Example 7: Ultra-low autofluorescence of GR650F polysilsesquioxane microrrafts enabled high-resolution fluorescence imaging of subcellular structures.

Fluorescence-based assays are important tools for cell selection. The fabrication of microrrafts using polysilsesquioxanes rather than polystyrene was found useful in producing microrrafts that exhibit lowered native fluorescence (autofluorescence). To measure native fluorescence, GR650F polysilsesquioxane microrrafts were fabricated and compared to polystyrene-based microrrafts and to No.1 cover glass. Each were soaked in PBS buffer. The native fluorescence of the GR650F polysilsesquioxane microrrafts, polystyrene microrrafts, and No.1 cover glass was examined using a Nikon Eclipse TE300 inverted epifluorescence microscope equipped with four fluorescent filter sets: a DAPI filter set (UV-2E/C; Nikon Instruments; excitation filter 340-380 nm, dichroic 400 nm long pass, emission 435-485 nm dichroic 500 nm long pass, emission 520 nm long pass); a fluorescein filter set (B-2A; Nikon Instruments; excitation filter 450-490 nm, dichroic 500 nm long pass, emission 520 nm long pass); a CY3 filter set (G-2E; Nikon Instruments; excitation filter 528-553 nm dichroic 565 nm long pass, emission 590-650 nm); and a Cy5 filter set (41008; Chroma Technology, Rockingham, VT; excitation filter 590-650 nm, dichroic 660-nm long pass, emission 665-740 nm). Images were collected with a cooled CCD camera (Photometrix Cool Snap; Roper Scientific, Tucson, AZ) using NIS-Elements software. The fluorescence intensity of individual microrrafts was obtained from the fluorescence images using NIS-Elements software (Nikon Instruments).

Using a DAPI filter set, the fluorescence of GR650F polysilsesquioxane microrrafts was only 21% that of polystyrene-based microrrafts (Figure 7A). Using a fluorescein filter set, the

fluorescence of GR650F polysilsesquioxane micrafts was only 3.4% that of polystyrene-based micrafts. Using a CY3 filter set, the fluorescence of GR650F polysilsesquioxane micrafts was only 3.6% that of polystyrene-based micrafts. Using a CY5 filter set, the fluorescence of GR650F polysilsesquioxane micrafts was only 16% that of polystyrene-based micrafts. At shorter wavelengths, the fluorescence of GR650F polysilsesquioxane micrafts were only slightly higher than No.1 cover glass, a standard material for high-resolution fluorescence imaging. This is probably due to the PDMS substrate (about 200 μm thickness) underneath the GR650F polysilsesquioxane micrafts.

These data demonstrated that GR650F micrafts have much lower autofluorescence than polystyrene-based micrafts and thus should enable high-resolution fluorescence imaging of subcellular structures. To demonstrate this capability, HeLa cells were cultured on the polystyrene-based and GR650F polysilsesquioxane micrafts for 4 hours. The mitochondria were stained with 250 nM MitoTracker Red CMXRos (ThermoFisher Scientific, M-7512) for 20 min. The cells were then fixed with 4% paraformaldehyde for 15 min, and permeabilized with 0.2% Triton X-100 in PBS for 10 min. The actin filaments of the cells were stained with ActinGreen 488 ReadyProbes Reagent (ThermoFisher Scientific, R37110) for 5 min at a diluted concentration of 10 μL reagent per 1 mL PBS. Finally, the nuclei of the cells were stained with Hoechst 33342 (2 $\mu\text{g/mL}$ in PBS) for 15 min.

Figure 7B shows the cells imaged using a 20 $\times$ objective under the fluorescein filter set at various gain levels. Compared with polystyrene-based micrafts, GR650F polysilsesquioxane micrafts exhibited both reduced autofluorescence and improved imaging properties by permitting higher gain settings and providing higher resolution during cell imaging.

Figure 7C shows a high-resolution image of a HeLa cell on a GR650F polysilsesquioxane micraft (top panel) using a 60 $\times$ objective. Subcellular structures (mitochondria and actin filaments) were clearly revealed. As a comparison, subcellular features of cells on polystyrene-based micrafts (bottom panel) were poorly revealed or unresolved under the same conditions.

Example 8: Improved image quality by reducing or eliminating inhomogeneity of refractive index across array components. When cells are imaged on a micraft array the micraft comes in direct contact with medium and the array substrate. The component materials of the array, however, possess different refractive indices (Figure 8A). For example, a polystyrene-based micraft (refractive index $n = 1.592$) has a markedly different refractive

index compared with PDMS ($n=1.41$) and cell culture medium ($n=1.35$). The inhomogeneity of refractive indices affects the image quality of the cells on the array, for example, by causing a dark border along the edge of each polystyrene-based micraft when the micraft array is imaged under brightfield (Figure 8B). Cells located at the edge of polystyrene-based micrafts (indicated by arrows in Figure 8B) were partially shaded by the dark borders. When GR650F polysilsesquioxane was used to fabricate the micrafts, the dark border was eliminated or reduced because the refractive index of GR650F ($n=1.42$) is closer to that of PDMS and cell culture medium than the polystyrene. The better matching of refractive indices improved image quality in brightfield, and provides for an improved light throughput that permits a shorter integration time on a camera for capturing an image of acceptable quality.

Although specific embodiments have been illustrated and described herein, those of ordinary skill in the art appreciate that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiments shown and that the invention has other applications in other environments. This application is intended to cover any adaptations or variations of the present invention. The following claims are in no way intended to limit the scope of the invention to the specific embodiments described herein.

We claim:

1. An apparatus for collecting or culturing cells or cell colonies, the apparatus comprising:

5 a substrate formed from a flexible resilient polymeric material and having a first surface and an opposed second surface and a plurality of wells formed in the first surface in the form of an array; and

a plurality of micro-elements releasably connected to the substrate, each micro-element comprising polysilsesquioxane,

10 wherein each of the micro-elements is resiliently received in one of the wells such that the micro-elements are arranged in the form of an array, and

15 wherein the apparatus exhibits improved properties for imaging resulting from low autofluorescence of the micro-element and refractive indices of the micro-element and the substrate that are closely matched.

2. The apparatus as recited in claim 1, wherein the polysilsesquioxane is a thermosetting polysilsesquioxane resin.

20 3. The apparatus as recited in claim 2, wherein the polysilsesquioxane resin is polymethylsilsesquioxane.

25 4. The apparatus as recited in claim 1, wherein the micro-elements further comprise ferromagnetic particles.

5. The apparatus as recited in claim 1, wherein the substrate comprises an elastomer.

6. The apparatus as recited in claim 5, wherein the elastomer is polydimethylsiloxane.

30 7. The apparatus as recited in claim 1, wherein the micro-elements are functionalized with a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine.

8. The apparatus as recited in claim 7, wherein the micro-elements further comprise a covalently bound biologically or chemically active moiety.

5 9. The apparatus as recited in claim 1, wherein the micro-elements are produced by the process of casting the micro-elements in the wells.

10. A method of collecting cells or cell colonies, comprising:

10 providing an apparatus having improved properties for imaging, the substrate comprising

a substrate formed from an elastomer and having a first surface and an opposed second surface and a plurality of wells formed in the first surface in the form of an array, and

15

a plurality of micro-elements having low autofluorescence and a refractive index closely matched to the refractive index of the substrate, each micro-element disposed in one of the wells and configured to release from the substrate upon mechanical distortion of the substrate, each micro-element comprising polysilsesquioxane;

20

depositing a liquid media carrying the cells on the apparatus so that the cells settle on or adhere to the micro-elements;

25

releasing at least one selected micro-element having the cells thereon by application of gradual mechanical pushing energy to the second surface of the substrate opposite the well in which the at least one selected micro-element is disposed until the at least one selected micro-element is released; and then collecting the at least one selected micro-element.

30

11. The method as recited in claim 10, wherein each micro-element of the plurality of micro-elements further comprises ferromagnetic particles.

12. The method as recited in claim 11, wherein each micro-element of the plurality of micro-elements is functionalized with a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine.

5

13. The method as recited in claim 12, wherein each micro-element of the plurality of micro-elements further comprises a covalently bound biologically or chemically active moiety.

14. The method as recited in claim 10, wherein the application of gradual mechanical
10 pushing energy is carried out by

positioning a probe adjacent the second surface of the substrate and oriented towards
the at least one selected micro-element, and

15 then progressively contacting the probe to the substrate until the at least one micro-
element is released therefrom.

15. A cell or cell colony isolated by the method of claim 10.

20 16. A method of making an apparatus for collecting or culturing cells or cell colonies, the
method of making comprising:

25 providing a substrate formed from an elastomer and having a first surface and an
opposed second surface and a plurality of wells formed in the first surface in the form
of an array;

coating the substrate with a fluid mixture comprising a polysilsesquioxane and a
compatible solvent; and

30 drying the coated substrate for removing the solvent and forming a rigid low auto-
fluorescent cell carrier in each of the wells.

17. The method of making as recited in claim 16, wherein the elastomer is
polydimethylsiloxane.

18. The method of making as recited in claim 16, wherein the polysilsesquioxane and compatible solvent mixture further comprises ferromagnetic particles.

5 19. The method of making as recited in claim 16, wherein the polysilsesquioxane is a thermosetting polysilsesquioxane resin.

20. The method of making as recited in claim 19, wherein the polysilsesquioxane resin is polymethylsilsesquioxane.

10 21. The method of making as recited in claim 16, wherein each of the cell carriers is functionalized with a silane coupling reagent having the general formula $R-Si(R')_3$, where R' can be one or more of OH, Cl or alkoxyl and where R has a terminal functional group comprising an epoxide, amine, carboxyl, vinyl, mercapto, or imine.

15 22. The apparatus as recited in claim 21, wherein the micro-elements further comprise a covalently bound biologically or chemically active moiety.

23. The method of making as recited in claim 16, wherein the compatible solvent is gamma-butyrolactone (GBL).

20

25

30


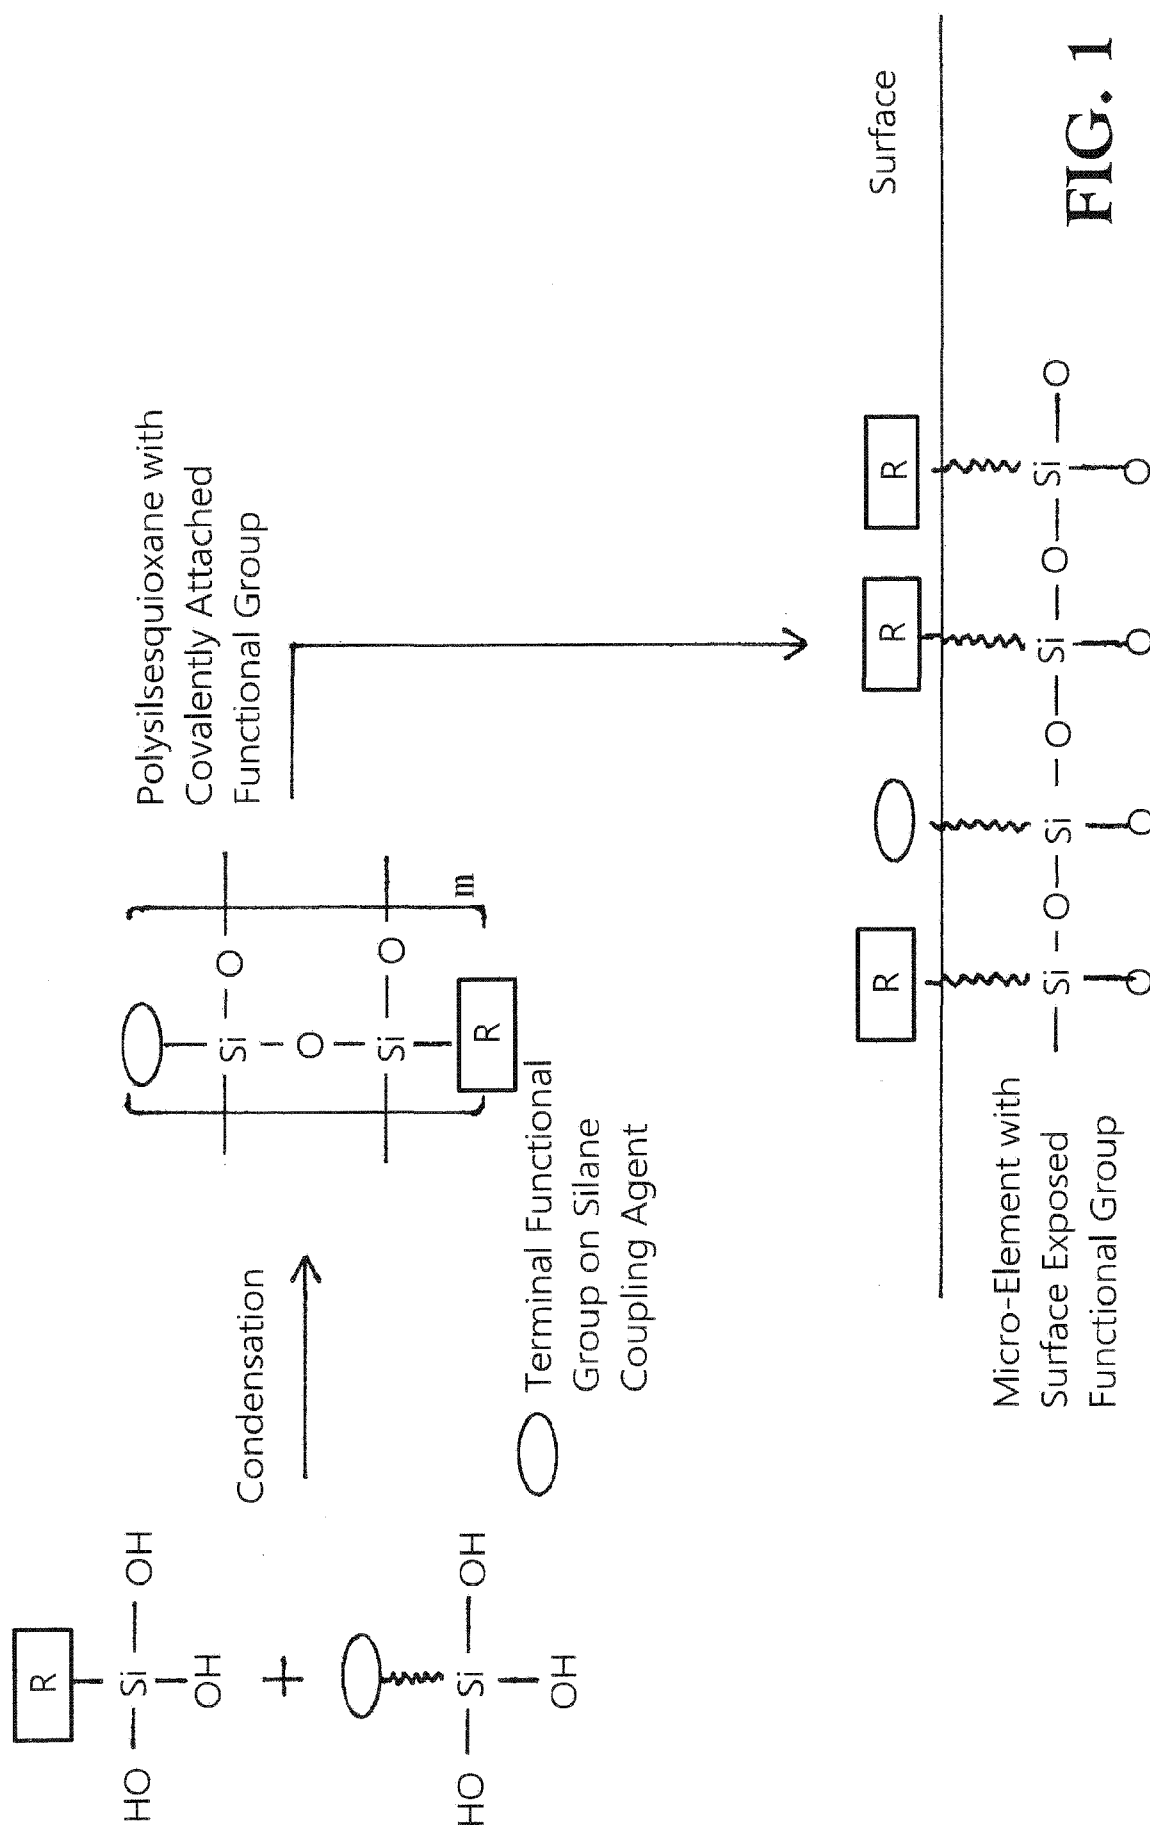


FIG. 1

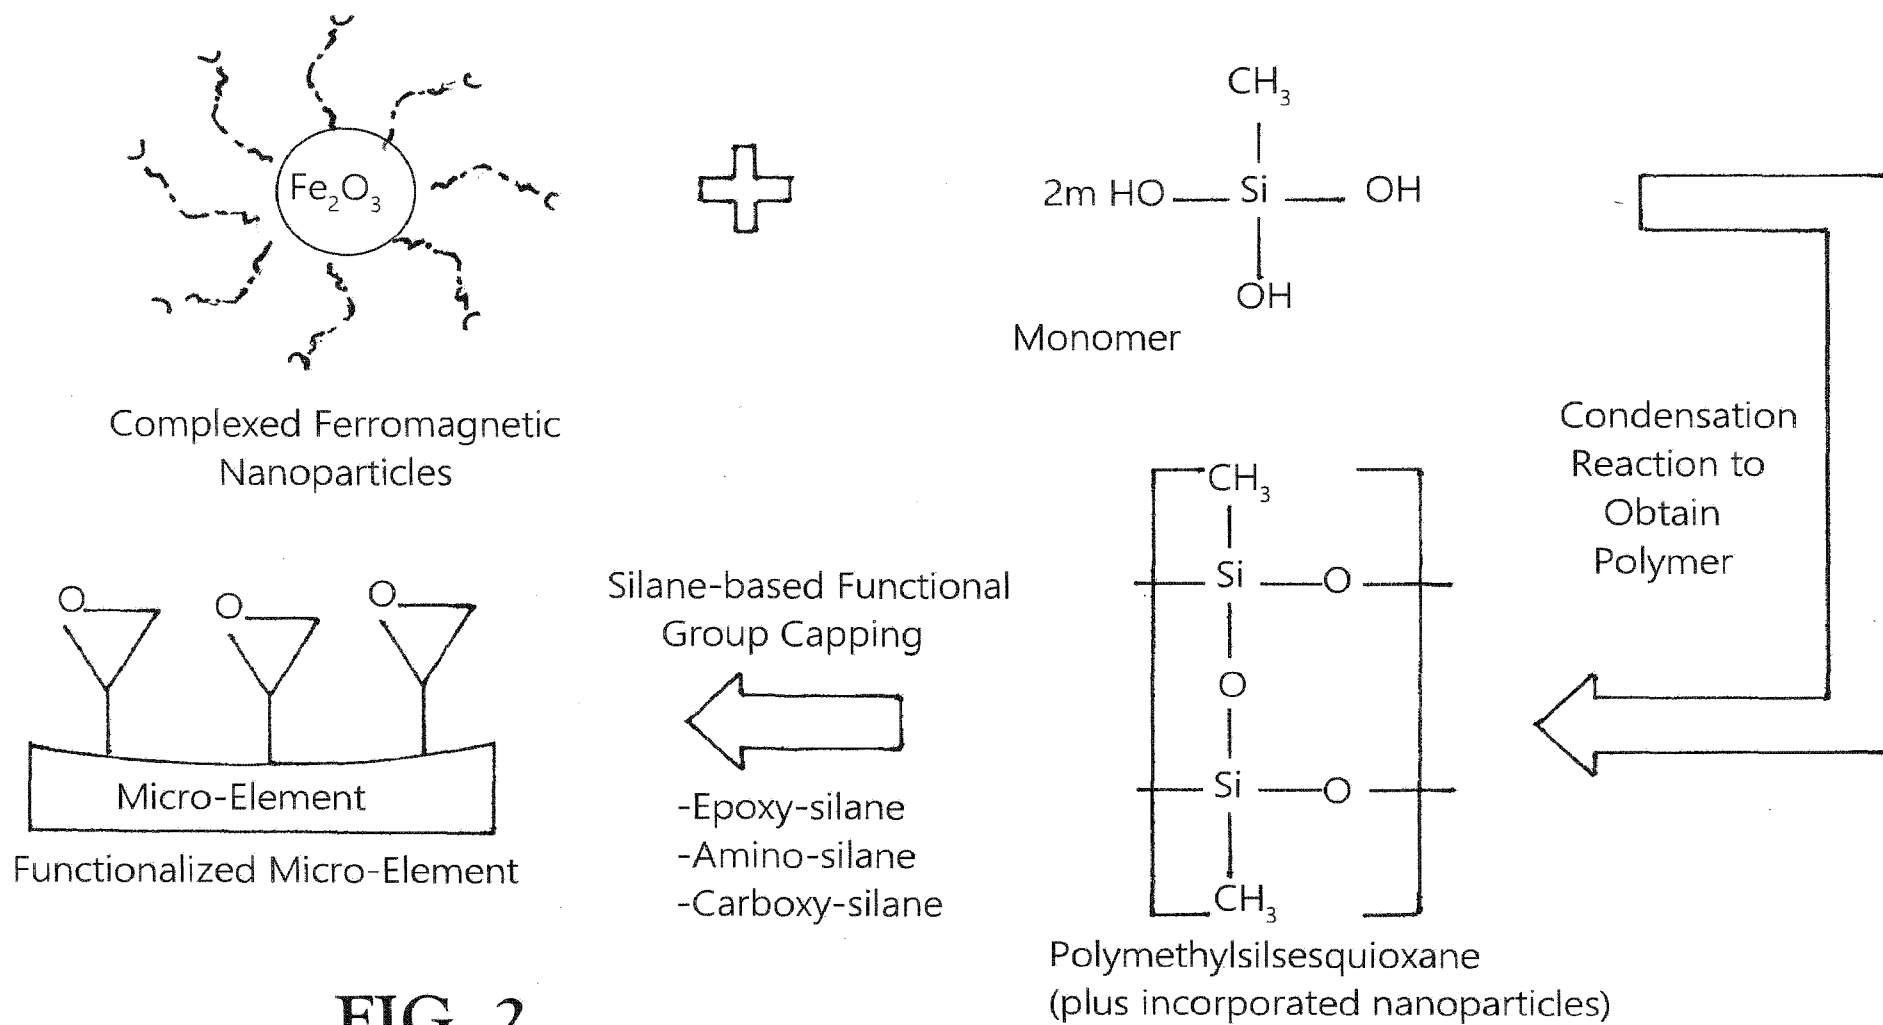

3/10

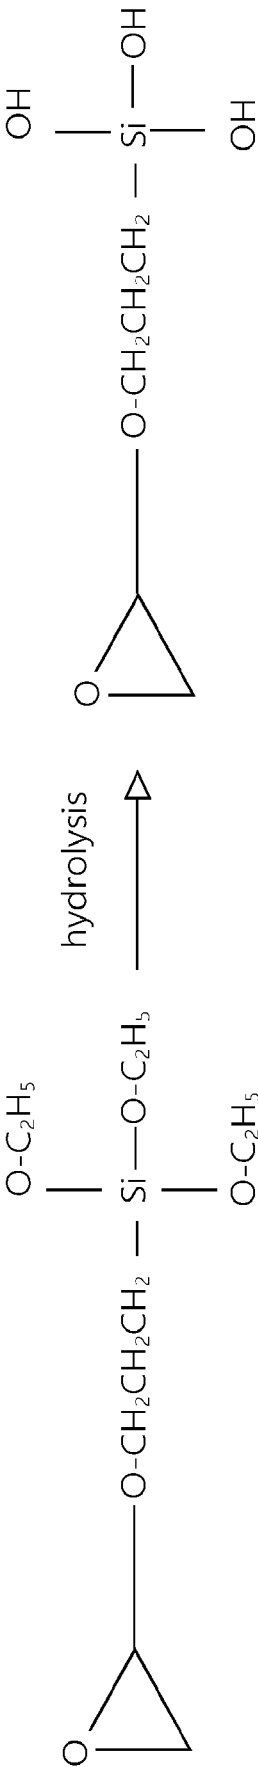
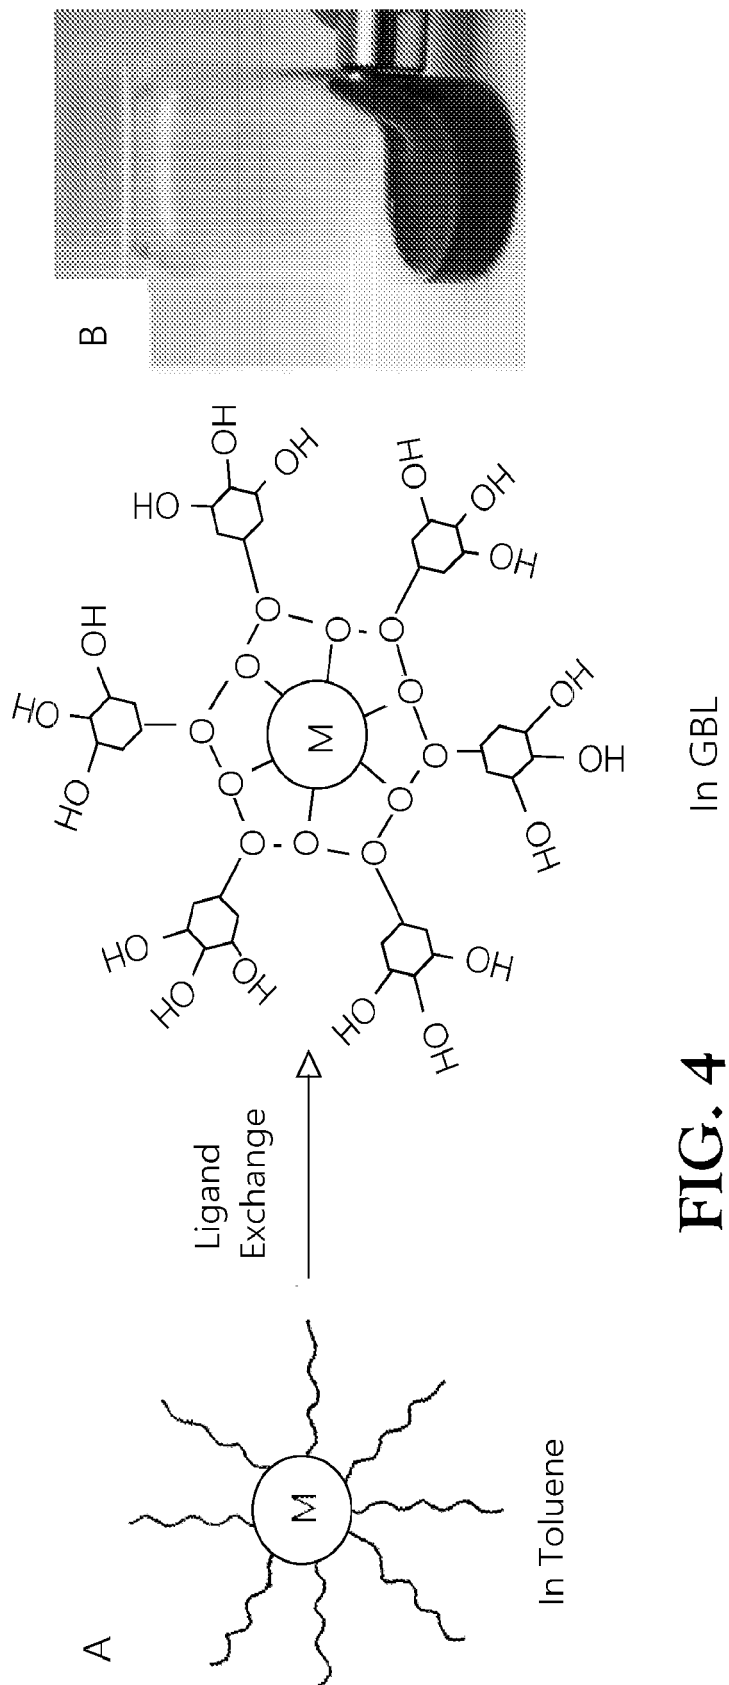


FIG. 3

4/10



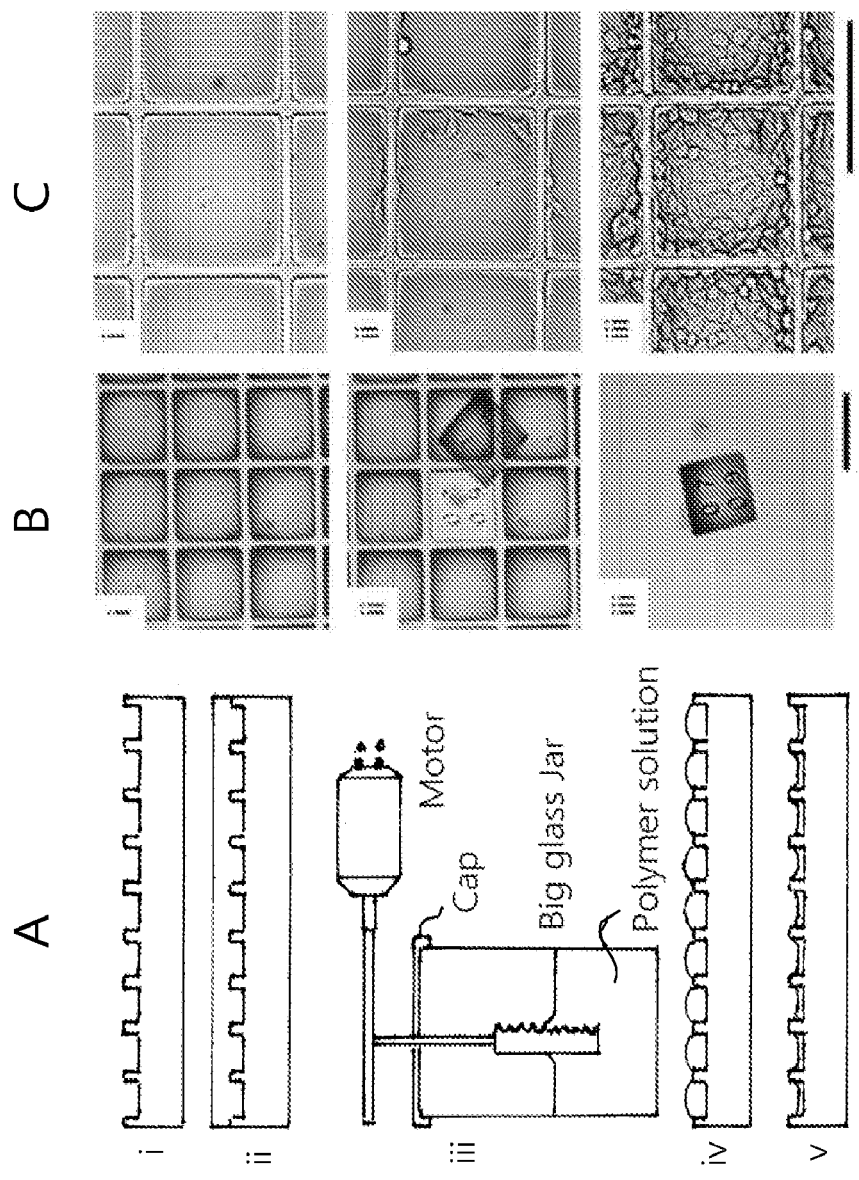


FIG. 5

6/10

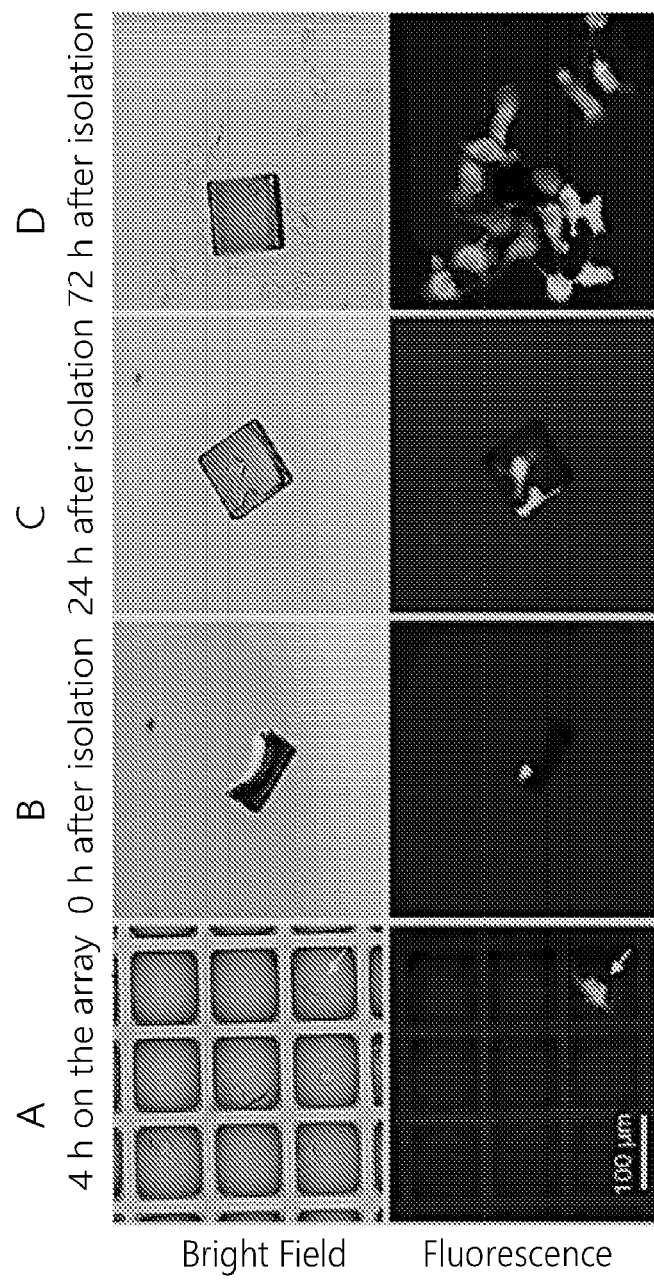


FIG. 6

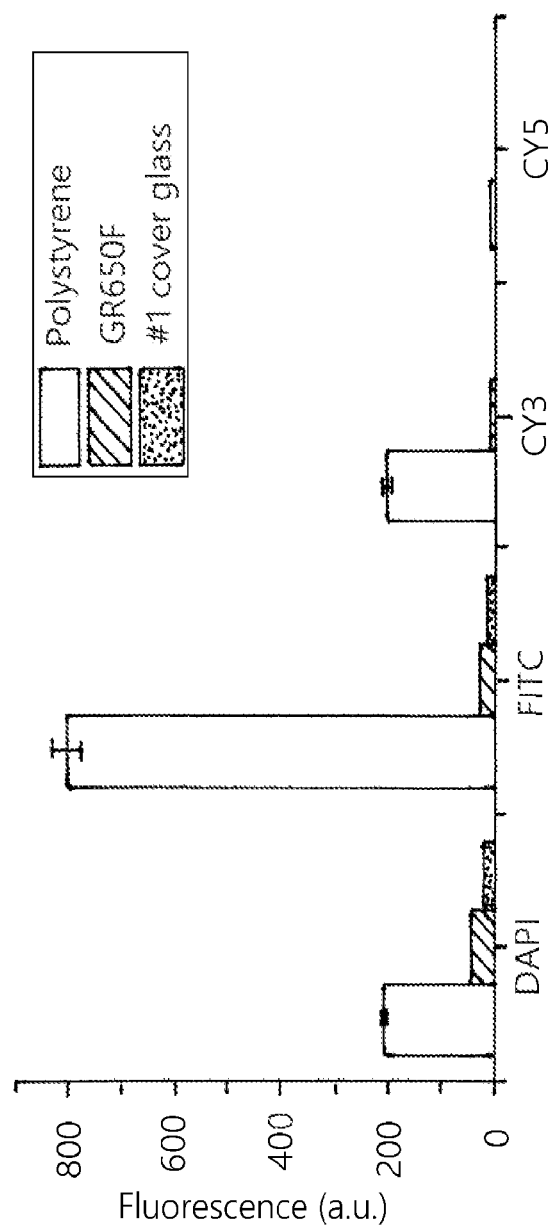


FIG. 7A

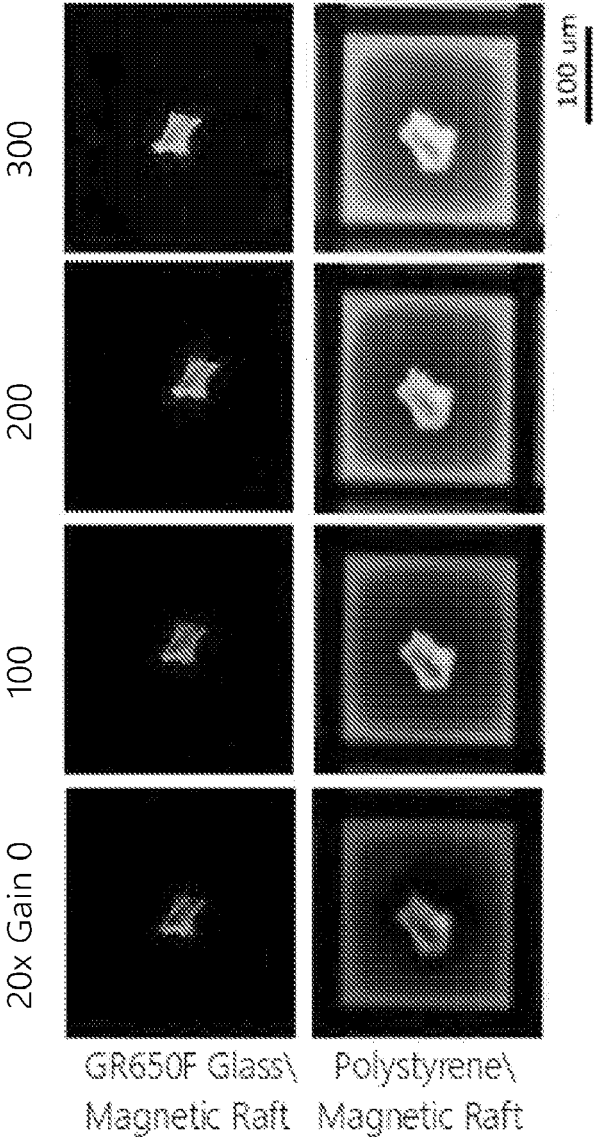


FIG. 7B


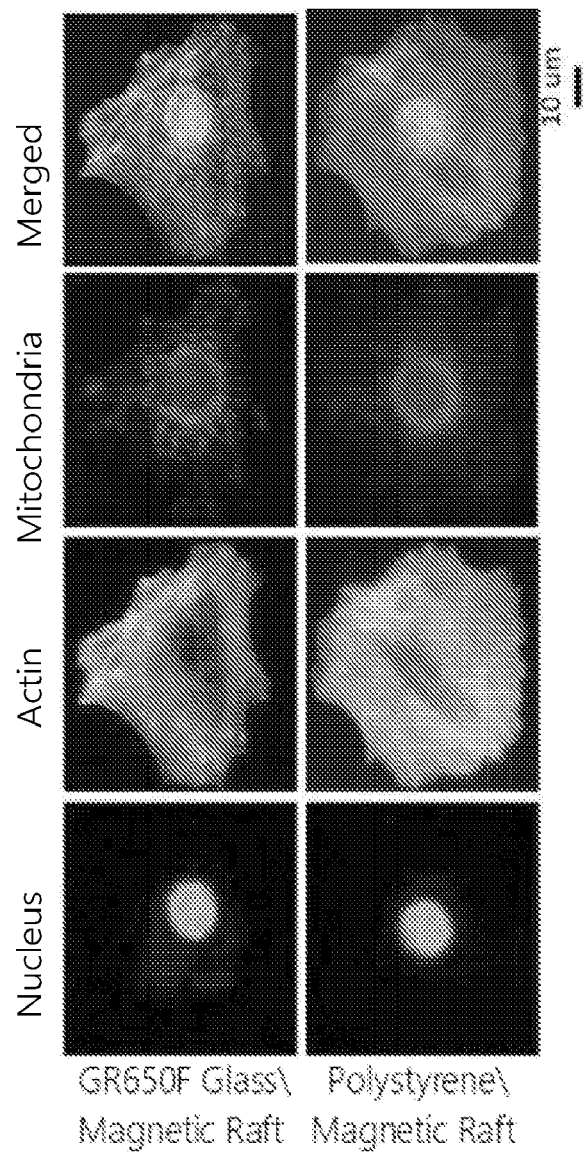


FIG. 7C

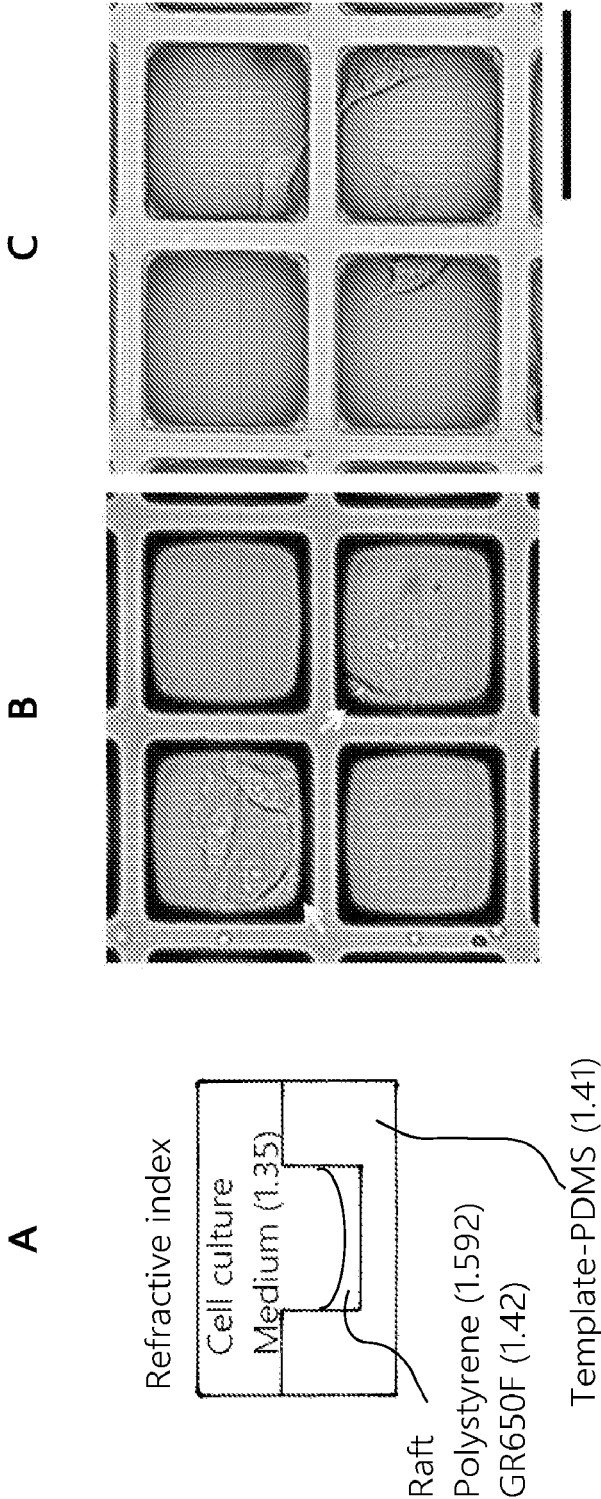

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/019889

A. CLASSIFICATION OF SUBJECT MATTER INV. C12M1/32 C12M1/00 C12M1/12 C12M1/34 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C12M B01L G02B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/103143 A1 (UNIV NORTH CAROLINA [US]; ALLBRITTON NANCY [US]; SIMS CHRISTOPHER [US]) 25 August 2011 (2011-08-25) claim 1	15
A	----- US 5 178 947 A (CHARMOT DOMINIQUE [FR] ET AL) 12 January 1993 (1993-01-12) claim 1	1-14, 16-23
A	----- WO 2007/008440 A2 (UNIV ILLINOIS [US]; CUNNINGHAM BRIAN T [US]; BLOCK IAN [US]; CHAN LEO) 18 January 2007 (2007-01-18) page 4, last paragraph; claim 1 ----- -/-	1-23
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
18 May 2017		30/05/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Jones, Laura

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/019889

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 223 149 A1 (CORNING INC [US]) 17 July 2002 (2002-07-17) claim 1	1-23
A	----- US 2012/237677 A1 (KORAMPALLY VENUMADHAV [US] ET AL) 20 September 2012 (2012-09-20) paragraphs [0001], [0054], [0055] -----	1-23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/019889

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011103143	A1	25-08-2011	CA 2789761 A1 25-08-2011
		EP 2536819 A1 26-12-2012	
		US 2013065795 A1 14-03-2013	
		US 2015251151 A1 10-09-2015	
		US 2015259637 A1 17-09-2015	
		WO 2011103143 A1 25-08-2011	

US 5178947	A	12-01-1993	AT 106720 T 15-06-1994
		AU 6849390 A 04-07-1991	
		CA 2033144 A1 28-06-1991	
		DE 69009721 D1 14-07-1994	
		DE 69009721 T2 08-12-1994	
		DK 0435785 T3 29-08-1994	
		EP 0435785 A1 03-07-1991	
		ES 2056423 T3 01-10-1994	
		FI 906381 A 28-06-1991	
		FR 2656319 A1 28-06-1991	
		JP H0737529 B2 26-04-1995	
		JP H04356527 A 10-12-1992	
		NO 905504 A 28-06-1991	
		PT 96328 A 30-09-1991	
		US 5178947 A 12-01-1993	

WO 2007008440	A2	18-01-2007	AU 2006269532 A1 18-01-2007
		AU 2006344709 A1 06-03-2008	
		CA 2614556 A1 18-01-2007	
		CA 2615417 A1 08-01-2007	
		EP 1904827 A2 02-04-2008	
		EP 1920235 A2 14-05-2008	
		JP 2009510391 A 12-03-2009	
		JP 2009520947 A 28-05-2009	
		NZ 565681 A 27-11-2009	
		NZ 565682 A 27-11-2009	
		WO 2007008440 A2 18-01-2007	
		WO 2008027025 A2 06-03-2008	

EP 1223149	A1	17-07-2002	EP 1223149 A1 17-07-2002
		US 2002090739 A1 11-07-2002	

US 2012237677	A1	20-09-2012	NONE
